



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets



Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

01400546.6

BEST AVAILABLE COPY

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk

DEN HAAG, DEN
THE HAGUE, 07/12/01
LA HAYE, LE

THIS PAGE BLANK (USPTO)



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

Blatt 2 der Bescheinigung
Sheet 2 of the certificate
Page 2 de l'attestation

Anmeldung Nr.:
Application no.: 01400546.6
Demande n°:

Anmeldetag:
Date of filing: 01/03/01
Date de dépôt:

Anmelder:
Applicant(s):
Demandeur(s):
Thomson Licensing S.A.
92648 Boulogne Cedex
FRANCE

Bezeichnung der Erfindung:
Title of the invention:
Titre de l'invention:
Laser welding for drum base

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat:
State:
Pays:

Tag:
Date:
Date:

Aktenzeichen:
File no.
Numéro de dépôt:

Internationale Patentklassifikation:
International Patent classification:
Classification internationale des brevets:
G11B15/61, G11B25/06

Am Anmeldetag benannte Vertragsstaaten:
Contracting states designated at date of filing: AT/BE/CH/CY/DE/DK/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/PT/SE/TR
Etats contractants désignés lors du dépôt:

Bemerkungen:
Remarks:
Remarques:

THIS PAGE BLANK (USPTO)

PF010019

1

Laser welding for drum base

This invention relates generally to rotary drums of tape recorders for recording and/or reproducing signals according to helical scan system and, more particularly, to an assembly of the rotary drum.

As is well known from video recorders, the rotary drum comprises a rotary part (upper drum) and a stationary part (lower drum), and forms a drum unit with a so-called drum base by means of which the drum is being arranged with a tilt angle with respect to the plane of recorder's tape deck chassis. For joining drum and drum base together, screw joints (as, for example, illustrated in Fig. 5) between drum base and the lower drum have been proved to be very worthwhile.

According to another solution, the tilt angle can be also realized by stamping the tape deck chassis accordingly. This solution is cheaper as it facilitates mounting the drum directly on the tape deck chassis, i.e. without the drum base mentioned before. This solution, however, has the drawback to be less accurate.

It is object of the present invention to provide a solution which is economical and which facilitates to mount the drum accurately.

This object is solved by a drum unit as specified in claim 1. Advantageous embodiments are specified in the subclaims.

The present invention is based on the idea to join lower drum and drum base together by welding, particularly by means of laser welding. This solution simplifies assembly of lower drum and drum base, called lower drum assembly in the following.

PF010019

2

As, according to the present invention, screw joints between drum base and the lower drum are not needed, screws can be saved and thus, drilling of tapped holes as well as screw holes can be avoided. Another benefit of this invention is that a machining regarding surface finish of the drum base and the lower drum for fitting them together (before assembling) is no more necessary and thus can be dispensed with.

Furthermore, measures may be provided to facilitate assembly procedure of the lower drum assembly which, particularly, can be realized by simple mouldings within lower drum and/or drum base.

Hence, costs of manufacturing drum units are greatly reduced.

The present invention will now be described in more detail with reference to the accompanying drawing which shows in:

Fig. 1 a plan view of a drum base of a lower drum assembly according to the first and/or the second embodiment of the invention;

Fig. 2 a) a plan view of the lower drum assembly according to the first embodiment of the invention, and
b) a sectional illustration of a detail;

Fig. 3 a plan view of the lower drum assembly according to the second embodiment of the invention, and
b) a sectional illustration of a;

Fig. 4 a welding jig; and

Fig. 5 a lower drum assembly according to prior art.

It should be pointed out initially that throughout the Figures 1-5 identical or equivalent elements/parts are designated with the same reference numerals or letters for sake of simplicity of the explanation.

PF010019

3

Fig. 5 shows a schematic illustration of a lower drum assembly according to prior art used in a rotary drum unit of a tape recorder for recording and/or reproducing signals according to helical scan system. Fig. 5 is a bottom view, i.e. looking from the tape deck chassis (not shown) of the recorder, of the lower drum assembly. Lower drum 1 and drum base 2 are joined together by three screw joints being arranged close to the circumference of lower drum 1 assembly. As can be taken from this figure, to facilitate assembly procedure of lower drum 1 and drum base 2 there are provided indexing holes 3a, 3b and an indexing pin 3c as well as other holes 4a, 4b to position lower drum 1 with respect to the drum base 2 and fit them together, respectively, before joining them together by means of screws 5a - 5c which are screwed into the lower drum 1.

The drum base 2 has positioning pins 6b - 6c for engaging corresponding holes of the tape deck chassis and a pin 6a for engaging a corresponding hole of an electronic board (not shown), and, furthermore, the lower drum base 2 has holes 7a - 7c for screw joints (not shown) of the drum base 2 with the tape deck chassis when the drum unit is arranged on the tape deck chassis.

Fig. 1 is a schematic illustration of a drum base 2 to be used for lower drum assemblies according to a first (Fig. 2) and a second (Fig. 3a) embodiment of the present invention. In contrast to the lower drum assembly according to the prior art, the drum base 2 of the first and the second embodiment, respectively, does not need any screw joints of the drum base 2 with the lower drum 1 because they are joined together by welding, particularly by means of laser welding (Fig. 4). However, the same material can be used, i.e. preferably conventional material like aluminium alloy.

For lower drum assemblies - according to the present invention by welding lower drum 1 on drum base 2 and vice

PF010019

4

versa, respectively - it advantageous when the same aluminium alloy is used each part, notably, to have a similar melting temperature. For example, aluminium alloys according to type ADC12 (Japanese norm) or according to type AS9U3 have been proved (European norm) to be well suited. But also a combination of both, i.e. one part is of ADC12 and the other part is of 9U3, has been proved to be suitable, too.

Fig. 2 and Fig. 3 illustrate the principle for two preferred embodiments of lower drum assembly according to the present invention, wherein a) is a bottom view of the respective lower drum assembly and b) a sectional view according to the intersection line A-B and C-D, respectively, showing welding areas F as the result of the laser welding. The welding areas F are depicted by dotted areas.

The first (Fig. 2) and the second (Fig. 3) embodiment can be distinguished from one another by the method how a corresponding laser beam 8 is applied. These methods are herein called "through-welding" and "side-welding", respectively. The first embodiment (Fig. 2) uses the method "through-welding", whereas the second embodiment (Fig. 3) uses the method "side-welding". The methods will be described now:

1. "through-welding"

The laser beam 8 is applied, for example, to the lower side of the drum base 2, called looking-down surface in the following. The alloy melts up to the upper surface of the drum base 2 and even on the lower surface of the lower drum 1. Welding is thus realized.

For facilitating the welding process the looking-down surface of the drum base 2 is provided with regions 9 of reduced thickness where the laser beam 8 is to be applied.

2. "side-welding"

PF010019

5

The laser beam 8 is applied in a predetermined radial manner so that the alloys melt together accordingly at certain areas F at the circumference of the lower drum assembly where the drum base 2 and the lower drum 1 abut.

5 Fig. 4 shows with a schematic illustration the principle of a welding jig 10 used for the lower drum assembly procedure according to the present invention. The welding jig 10 essentially comprises a holder 11 and a shaft 12. The shaft 12 is similar to drum's driving shaft but, in
10 this case, used as a facility to arrange lower drum 1 and drum base 2 in connection with a drum base fixation jig (not shown). As it is illustrated by means of arrows 13a, 13b the drum base fixation jig engages with the drum base 2 in a defined manner in order to fit and press drum base 2 and
15 lower drum 1 together before joining them together by welding due to the respective application of the laser beam 8: According to the method "through-welding", the laser beam 8 is applied square to the so-called looking-down surface of the drum base 2, and according to the method "side-welding",
20 the laser beam 8 is radially applied as depicted in Fig.4, for example.

To avoid deforming the drum, it has to be considered that drum base 2 and lower drum 1 are fitted together closely during the laser welding process, particularly with
25 regard to mass production line. This is achieved by uniform flatness of the upper surface of drum base 2 and the lower surface of lower drum.1 where drum base 2 and lower drum 1 abut so that both the drum base 2 and the lower drum 1 are very close to one another.

30 For generation of the laser beam 8, there can be used a laser type according to HAAS HPL 62P (from HAAS LASER), for example. A laser beam 8 having a beam diameter 1 mm and a beam angle 76°, for example, has been proved to be suitable.

35

PF010019

6

Claims

1. Rotary drum for a tape recorder for recording and/or reproducing signals according to helical scan system, comprising a rotary upper drum and a stationary lower drum (1) and provided with a drum base (2), the drum base (2) and the lower are joined together to form a lower drum assembly by means of which the drum can be arranged in a predetermined manner on a tape deck chassis of the recorder inclusively a tilt angle with regard to tape deck chassis' plane, characterized in that the drum base (2) and the lower drum (1) are joined together by a welded joint at a certain area (F) of the lower drum assembly where the drum base (2) and the lower drum (1) abut.
2. The rotary drum according to claim 1, characterized in that that the drum base (2) and the lower drum (1) are joined together by welding with a laser beam (8).
3. The rotary drum according to claim 2, characterized in that the drum base (2) and the lower drum (1) are joined together by through-welding whereby the laser beam (8) is applied square to looking-down surface of the drum base (2).
4. The rotary drum according to claim 3, characterized in that the looking-down surface of the drum base (2) is provided with regions (9) of reduced thickness where the laser beam (8) is to be applied.
5. The rotary drum according to claim 2, characterized in that the drum base (2) and the lower drum (1) are joined together by side-welding whereby the laser beam (8) is applied in a predetermined radial manner to get a welded joint at a certain area (F) at circumference of the lower drum assembly where the drum base (2) and the lower drum (1) abut.

PF010019

7

6. Apparatus according to helical scan system for recording and/or reproducing signals onto/from a magnetic tape having a rotary drum according to claim

5

1.

PF010019

8

Abstract

As is well known from video recorders, the rotary drum comprises a rotary part (upper drum) and a stationary part
5 (lower drum), and forms a drum unit with a drum base (2) by means of which the drum is being arranged with a tilt angle with respect to the plane of recorder's tape deck chassis.

According to the present invention, lower drum (1) and drum base (2) are joined together by welding, particularly
10 by means of laser welding. This solution simplifies assembly of lower drum (1) and drum base (2) and reduces costs of manufacturing drum units.

15 Fig.4

PF010019

1/2

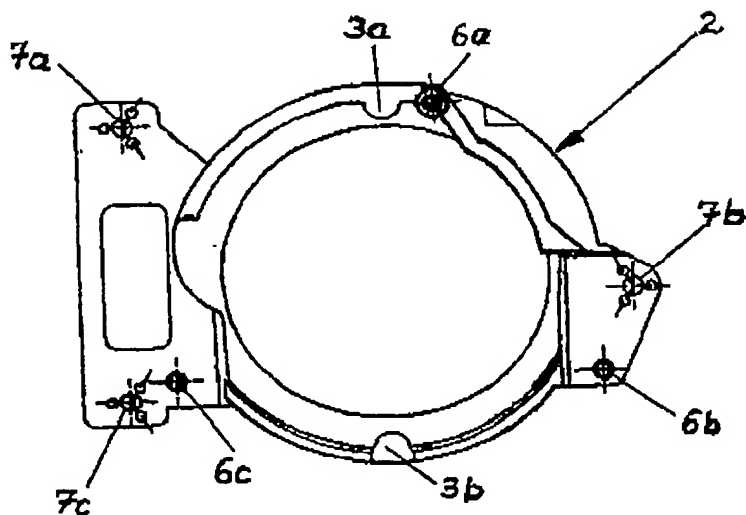


Fig. 1


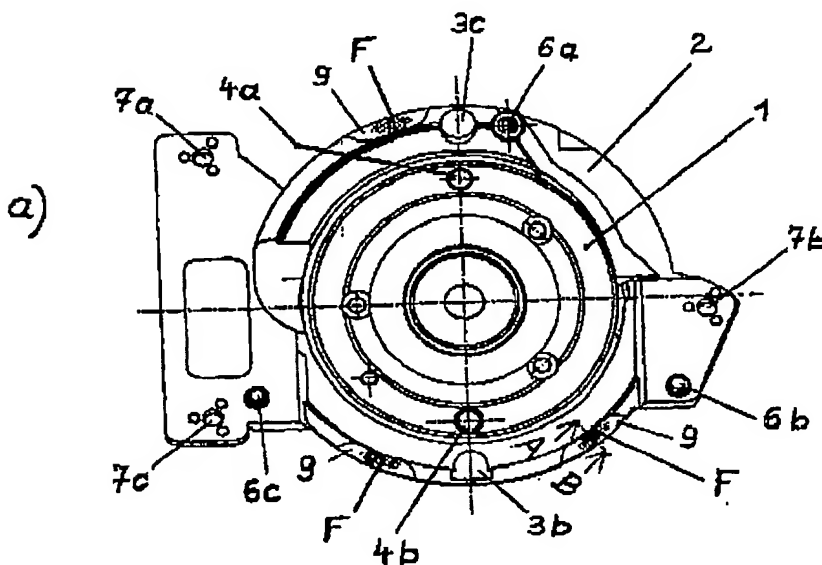


Fig. 2


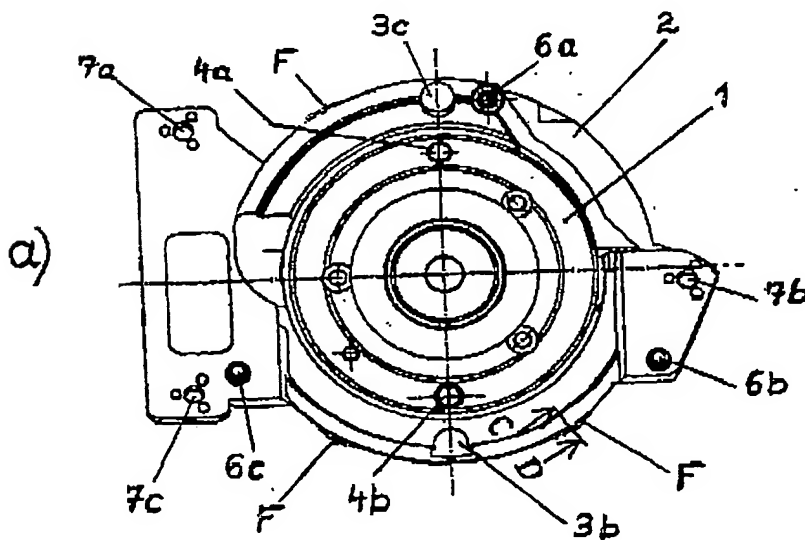


Fig. 3

Fig. 4


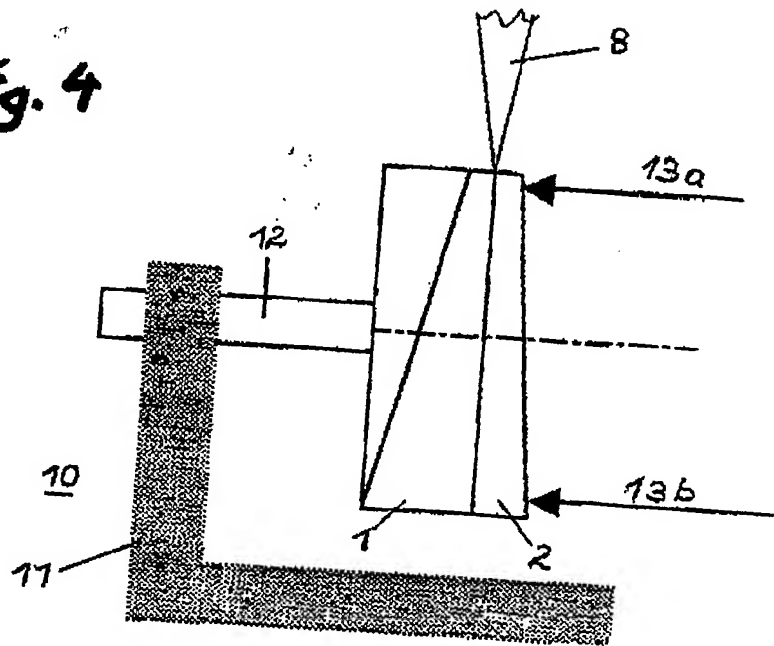


Fig. 5

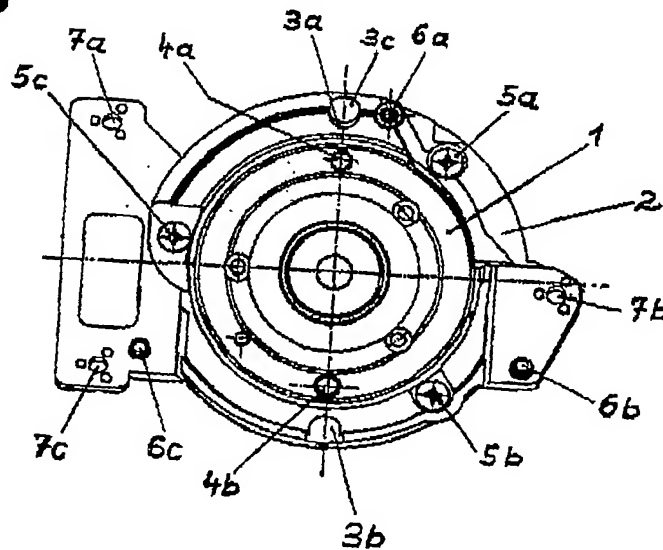

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

